Installation Guide

Thank you for purchasing our UFO High Bay. Carefully read all instructions and labels prior to installation.

- **PRIOR TO INSTALLATION, MAINTENANCE OR INSPECTION, TURN OFF ELECTRICAL POWER AT FUSE OR CIRCUIT BREAKER BOX.**
- **CAUTION:** TO REDUCE RISK OF DEATH, PERSONAL INJURY, ELECTRICAL SHOCK, CUTS/ABRASIONS, FALLING PARTS OR PROPERTY DAMAGE FROM FIRE, CAREFULLY READ ALL WARNINGS, INSTRUCTIONS AND PRODUCT LABELS.
- DO NOT install if product is damaged.
- The installation, service and maintenance of this light fixture must be performed by a licensed electrician. If you are not qualified, contact a licensed electrician.
- Product installation must comply with the National Electrical Code and all local electrical and building codes and regulations.
- Ensure mounting surface and customer supplied components are capable of supporting the weight of the luminaire.

Operational Notes

- Input Voltage Range: 100-277VAC, 50/60Hz. If input voltage exceeds this range, it may cause failure. Please be sure to operate within given input voltage range.
- Ensure ambient operating temperature is between -20°C and 40°C. Using this UFO High Bay in temperatures outside given range will reduce the UFO High Bay lifespan.
- IP Rating: IP65, rated for use in wet locations.
- Please keep UFO High Bay away from any corrosive substances. When cleaning, please use damp or dry cloth.

Installation Guide

Suspension Installation



1. Screw in j-hook.



2. Tighten the set screw.



3. Hang the light onto the existing mount for retrofit or install eye hook if necessary.



4. Lock j-hook into place with locking screw.

Suspension Installation



1. Screw in the adapter.



2. Tighten the set screw.



3. Screw the pole into the adapter.



4. Lock j-hook into place with locking screw.

Installation Guide

Product Dimension

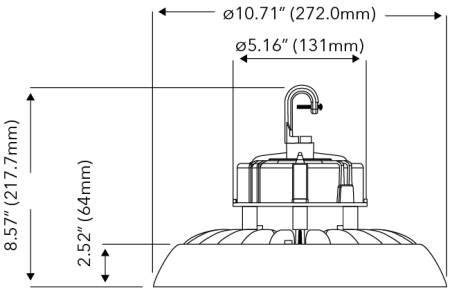

100W
9.2 lbs

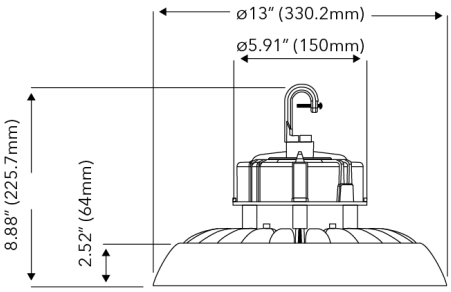

150W
9.9 lbs

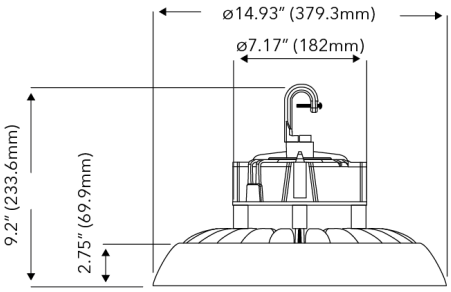

200W
13.5 lbs

Wiring Connection

Turn off the power, connect AC wire, black wire to L, white wire to N, and green wire to ground.

Dimmable Driver Connection

1. Compatible with 0-10V dimming.
2. Connect wires as below, purple wire is D +, gray wire is D -, cap black wire.

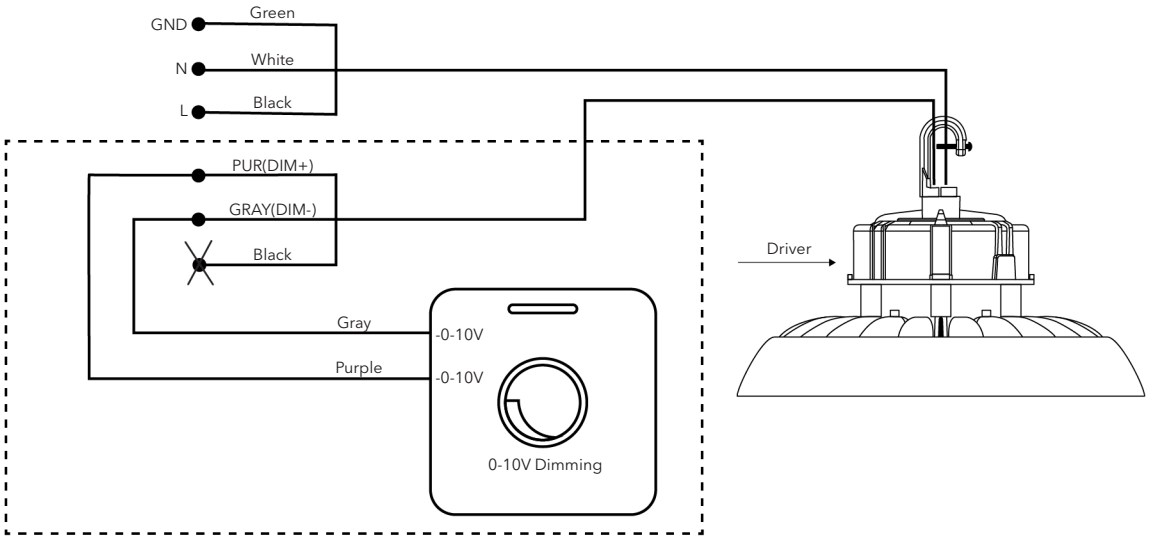

The installation must be carried out by qualified electrician.

Warranty & Support

Verbatim 5-year warranty www.verbatimlighting.com/warranty.
For support, visit www.verbatimlighting.com/support
May not be compatible with all dimmers.
For up-to-date compatibility please visit www.verbatimlighting.com/dimmer_support.