

## Safety Information

### **WARNING: RISK OF SERIOUS INJURY AND PROPERTY DAMAGE**

Carefully read all instructions and product labels prior to installation.

- To reduce risk of death, personal injury, electric shock, cuts/abrasions, falling parts, or property damage from fire, carefully read all warnings, instructions and product labels.
- The installation, service and maintenance of this light fixture must be performed by a licensed electrician. If you are not qualified, contact a licensed electrician.
- Product installation must comply with the National Electrical Code and all local electrical and building codes and regulations.
- DO NOT install if product is damaged.
- Prior to installation, maintenance, inspection or removal, turn off electrical power at fuse or circuit breaker box.
- Do NOT use input power other than the voltage specified on the Product Specifications.
- Do NOT install in wet environments where directly exposed to water.
- All wiring connections should be capped with UL approved wire connectors.
- Ensure that your installation matches all elements shown in the photographs and drawings of the installation instructions before you begin.
- Do NOT make or alter any openings in the housing of the light fixture during installation.
- Do NOT allow the wiring to contact sharp edges, such as sheet metal edges.
- This recessed light fixture is intended for mounting only in a covered ceiling (where LED side of light fixture will only be exposed to damp or dry locations, not wet locations)
- Do NOT use this light fixture in or with exit signs or emergency light fixtures.
- Wear gloves and safety glasses at all times when removing light fixture from carton, installing, servicing, or performing maintenance.
- Avoid looking directly into light while on.

### **CAUTION: RISK OF FIRE**

- Keep combustible and other materials that can burn away from light fixture and lamp/lens.

## Warranty & Support

Verbatim 5-year warranty [www.verbatimlighting.com/warranty](http://www.verbatimlighting.com/warranty).

For support, visit [www.verbatimlighting.com/support](http://www.verbatimlighting.com/support)

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

## Retrofit Installation


### **ATTENTION: Ensure that the power to recessed housing is switched off prior to beginning installation.**

1. Remove existing lamp(s).
2. Remove existing reflector and retaining clips from mounting frame and discard.
3. Open the side board of junction box.
4. Locate the junction box containing supply wires and cut all supply wires leading to ballast. Remove the wires connected to the ballast if necessary.
5. Twist out the conduit knockout.
6. Install and connect the supply to the input wire and ground wire.
7. Install the downlight kit in the mounting frame by lifting upward on both mounting springs. Push the kit until it sits flush against the ceiling.
8. Once installation is complete, restore power.

## New Construction Installation

**ATTENTION: Ensure that the power is turned off at the source to the location in which you are installing the product.**

1. Cut a ceiling hole according to the dimensions provided.
2. Open the cover of the junction box and insert lamp conduit into the junction box.
3. Connect the black wire to the live wire, white wire to neutral wire using connectors and cap off the ground using wire nut. Close the cover of the box.
4. Squeeze the two housing clips into an upright position and insert lamp into the ceiling.
5. Release the housing clips and push lamp into ceiling until secure and flush.
6. Once installation is complete, restore power.

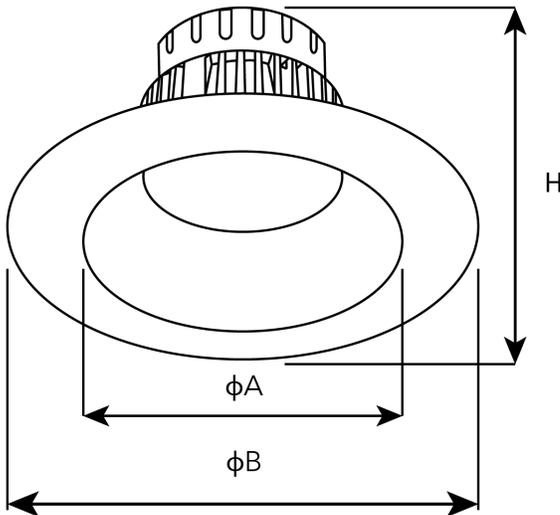

	$\phi A$		$\phi B$		$H$	
	inches	mm	inches	mm	inches	mm
6"	5.83	148	7.48	190	3.94	100
8"	7.87	200	9.45	240	4.33	110