Verbatim Lighting

2022 Product Catalog

LED Fixtures and Lamps

Visit **www.verbatimlighting.com** for detailed product information, including:

- Features and Benefits
- Cut Sheets
- Overviews
- Installation Guides
- Technical Diagrams

Table of Contents

FIXTURES **1**
- TranquiLED Series Low-Glare Downlights 1
- Napoleon Downlight Series 2
- JBox Downlights 2
- Surface Mount Downlights 3
- Retrofit Downlights 3
- Commercial Downlights 4
- Linear Fixtures 4
- PnP Motion Sensor Ready Highbays 5
- Flat Panels 5
- RetroStick Series 6

LAMPS **7**
- T8 Tubes 8
- A19 8
- BR30/BR40 8
- PAR20/PAR30/PAR38 9
- PAR56 9
- S14 10
- Candles/Globes 10
- AR111 11
- MR16 11

FIXTURES | Verbatim LED fixtures are high-quality, efficient solutions for a variety of commercial interior and exterior applications including manufacturing and office.

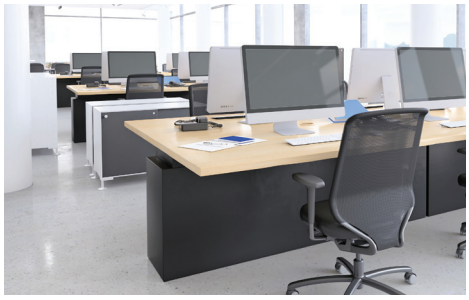

TranquiLED Series Low-Glare Downlights

70251 | 70252 | 70253
70254 | 70259 | 70260
70261 | 70262

70255 | 70256 | 70257
70258 | 70263 | 70264
70265 | 70266

TranquiLED Driver*

Check out the latest
TranquiLED Video

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (CFL)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
0-10V	70251	D4TQ-C30-W14-V277	4 in. Downlight	✓	3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70252	D4TQ-C40-W14-V277	4 in. Downlight	✓	4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70253	D4TQ-C30-W27-V277	4 in. Downlight	✓	3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70254	D4TQ-C40-W27-V277	4 in. Downlight	✓	4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70255	D6TQ-C30-W14-V277	6 in. Downlight	✓	3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70256	D6TQ-C40-W14-V277	6 in. Downlight	✓	4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70257	D6TQ-C30-W27-V277	6 in. Downlight	✓	3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70258	D6TQ-C40-W27-V277	6 in. Downlight	✓	4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
PHASE CUT	70259	D4TQ-C30-W14-V120	4 in. Downlight	✓	3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70260	D4TQ-C40-W14-V120	4 in. Downlight	✓	4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70261	D4TQ-C30-W27-V120	4 in. Downlight	✓	3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70262	D4TQ-C40-W27-V120	4 in. Downlight	✓	4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70263	D6TQ-C30-W14-V120	6 in. Downlight	✓	3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70264	D6TQ-C40-W14-V120	6 in. Downlight	✓	4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70265	D6TQ-C30-W27-V120	6 in. Downlight	✓	3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70266	D6TQ-C40-W27-V120	6 in. Downlight	✓	4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90

* Included with TranquiLED Downlight

Napoleon Downlight Series

15º, 25º, 40º Beam angle filters included

Check out the latest Napoleon Video

70651 | 70652 | 70653

Napoleon Trims*

Round white trim with white baffled reflector
70663

Round black trim with black baffled reflector
70664

Round white trim with white smooth reflector and 24º gimbal
70665

Round white eliptical trim with black baffled reflector
70666

Round white pin hole trim with black baffled reflector
70667

Square white trim with white baffled reflector
70668

Square white trim with black baffled reflector
71131

Square white wall wash trim with black baffled reflector
70669

Round white trim with smooth shallow reflector
70671

Round black trim with smooth shallow reflector
70672

Round white trim with smooth deep reflector
70670

VERBATIM PART #		MODEL #	TYPE	JA8 CERTIFIED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (HALOGEN)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
NAPOLEON	70651	D2-C27-W13	2 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	2700K	1200lm	13W	75W	25,000	Phase cut	120V	90
	70652	D2-C30-W13	2 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	3000K	1250lm	13W	75W	25,000	Phase cut	120V	90
	70653	D2-C40-W13	2 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	4000K	1300lm	13W	75W	25,000	Phase cut	120V	90

*Sold Separately

JBox Downlights

70621

70622

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	JA8 CERTIFIED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	70621	D4-L650-5CCT-JB	4 in. CCT Selectable Downlight w/ junction box		√	√	2700K/3000K/3500K 4000K/5000K Selectable	650lm	9W	60W	50,000	√	120V	90
	70622	D6-L900-5CCT-JB	6 in. CCT Selectable Downlight w/ junction box		√	√	2700K/3000K/3500K 4000K/5000K Selectable	900lm	12W	75W	50,000	√	120V	90

Surface Mount Downlights



70268 | 70269
71164 | 71165

70270 | 70271

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	JA8 CERTIFIED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
120V	71164	D5-L730-5CCT-SM	5 in. Downlight - Round	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	730lm	12W	75W	50,000	√	120V	90
	71165	D7-L1050-5CCT-SM	7 in. Downlight - Round	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	1050lm	13W	100W	50,000	√	120V	90
120 – 277V	70268	D7-L900-C30-SM-RD-V277	7 in. Downlight - Round	✓	√	3000K	900lm	15W	75W	50,000	√	120-277V	90
	70269	D7-L900-C40-SM-RD-V277	7 in. Downlight - Round	✓	√	4000K	900lm	15W	75W	50,000	√	120-277V	90
	70270	D7-L900-C30-SM-SQ-V277	7 in. Downlight - Square	✓	√	3000K	900lm	15W	75W	50,000	√	120-277V	90
	70271	D7-L900-C40-SM-SQ-V277	7 in. Downlight - Square	✓	√	4000K	900lm	15W	75W	50,000	√	120-277V	90

Retrofit Downlights

71142

71143

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
CCT	71142	D4-L650-5CCT-W8	4 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	650lm	8W	65W	50,000	E26	√	120V	90
	71143	D6-L1200-5CCT-W15	6 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	1200lm	15W	120W	50,000	E26	√	120V	90

Commercial Downlights

71158

71159

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	T24	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (CFL)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	71158	D6-3CCT-3W-CD	6 in. Commercial Downlight		√	3000K/3500K/4000K Selectable	800lm/1200lm/1600lm	9W/13W/19W Selectable	18W/26W/32W	50,000	0-10V	120-277V	90
	71159	D8-3CCT-3W-CD	8 in. Commercial Downlight		√	3000K/3500K/4000K Selectable	1500lm/2000lm/2500lm	16.5W/23W/29W Selectable	32W/42W/65W	50,000	0-10V	120-277V	90

Linear Fixtures

99305 | 99585

70694 | 70695

Linear Fixture Accessories*

Batten Remote
for 99305 & 99585
98992

End to End Support Bracket
& Connecting Kit for
70694 & 70695
71132

Suspension Kit for
70694 & 70696
71133

VERBATIM PART #		MODEL #	TYPE	COLOR TEMP	LUMEN OUTPUT	WATTAGE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
BATTEN	99305	BAT-4FT-W26-C50-MS-NON	4 ft. Batten with dual motion sensor	5000K	3000lm	26W	50,000	Bi-level	100–277V
	99585	BAT-4FT-W26-C50-MS-NON-EM	4 ft. Batten with motion sensor & emergency backup	5000K	3000lm	26.5W	50,000	Bi-level	100–277V
LINEAR CHANNEL	70694	LN-2FT-W20-3CCT	2 ft. CCT Selectable Linear channel	3500K/4000K/5000K Selectable	2600lm	20W	50,000	0-10V	120-277V
	70695	LN-4FT-W40-3CCT	4 ft. CCT Selectable Linear channel	3500K/4000K/5000K Selectable	5200lm	40W	50,000	0-10V	120-277V

PnP Motion Sensor Ready Highbays

70605 | 70610

70623 | 70607
70624

PnP Motion Sensor Ready Accessories

Plug and Play Microwave Motion Sensor

70681

Sensor Remote Control for 70681

70682

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
HIGH BAYS	70605	CRQ-150W-C50 [-MS;Blank]	10" Black Round High Bay w/PnP motion sensor receptical	√	5000K	22500lm	150W	400W HID	50,000	0-10V	100-277V
	70610	CRQ-200W-C50 [-MS;Blank]	11" Black Round High Bay w/PnP motion sensor receptical	√	5000K	30000lm	200W	>400W HID	50,000	0-10V	120-277V
	70623	HB-110W-C50 [-MS;Blank]	10" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	5000K	14850lm	110W	250W HID 4 x T5 tubes	50,000	0-10V	120-277V
	70607	HB-165W-C50 [-MS;Blank]	13" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	5000K	22275lm	165W	400W HID 4 x T5 HO tubes	50,000	0-10V	120-277V
	70624	HB-220W-C50 [-MS;Blank]	17" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	5000K	29700lm	220W	>400W HID 6 x T5 HO tubes	50,000	0-10V	120-277V

Flat Panels

71163 | 70693

71155 | 71156 | 70694

Flat Panel Accessories*

2' x 2' Surface Mount Kit
99271

2' x 4' Surface Mount Kit
99345

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	BEAM ANGLE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
BACKLIT PANELS	71163	PN22-3W-3CCT-P	2 ft. X 2 ft. Backlit Panel	Premium	3500K/4000K/5000K Selectable	2500lm/3125lm/3750lm Selectable	20W/25W/30W Selectable	120º	50,000	0-10V	100-277V
	71156	PN24-3W-3CCT-P	2 ft. X 4 ft. Backlit Panel	Premium	3500K/4000K/5000K Selectable	3750lm/4375lm/5000lm Selectable	30W/35W/40W Selectable	120º	50,000	0-10V	100-277V
	71155	PN24-W40-C40-P	2 ft. X 4 ft. Backlit Panel	Premium	4000K	5000lm	40W	120º	50,000	0-10V	100-277V
	70693	PN22-W40-3CCT-EM	2 ft. X 2 ft. Backlit Panel w/EM battery backup	-	3500K/4000K/5000K Selectable	4400lm	40W/8W in EM	120º	50,000	0-10V	100-277V
	70694	PN24-W50-3CCT-EM	2 ft. X 4 ft. Backlit Panel w/EM battery backup	-	3500K/4000K/5000K Selectable	5500lm	50W/8W in EM	120º	50,000	0-10V	100-277V

* Sold Separately

RetroStick Series

Check out the latest RetroStick Series Video

70454 | 70603 | 70432
70443 | 70440 | 70444

70455 | 70604
70401 | 70445

70640 | 70699
70641 | 70700

T5 RetroStick Accessories*

Power Cable
12" - 70402
36" - 70441

Power Cable with
90° Connector
36" - 70456

Connecting Cord
7" - 70404
12" - 70403

Connecting Cord
with 90° Connector
12" - 70457

Surface Mount
Bracket
70407

HO RetroStick Accessories*

Power Cable
36" - 70656

Connecting Cord
15" - 70657

End to End Support Bracket
70687

Suspension Kit
70688

Surface Mount Kit
70696

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
RETROSTICK	70454	LNT5-2FT-C30-W9 (30pk)	2 ft. T5 RetroStick	–	3000K	1260lm	9W	50,000	–	100–277V
	70603	LNT5-2FT-C30-W9 (4pk)	2 ft. T5 RetroStick	–	3000K	1260lm	9W	50,000	–	100–277V
	70432	LNT5-2FT-C40-W9 (30pk)	2 ft. T5 RetroStick	–	4000K	1260lm	9W	50,000	–	100–277V
	70443	LNT5-2FT-C40-W9 (4pk)	2 ft. T5 RetroStick	–	4000K	1260lm	9W	50,000	–	100–277V
	70440	LNT5-2FT-C50-W9 (30pk)	2 ft. T5 RetroStick	–	5000K	1260lm	9W	50,000	–	100–277V
	70444	LNT5-2FT-C50-W9 (4pk)	2 ft. T5 RetroStick	–	5000K	1260lm	9W	50,000	–	100–277V
	70455	LNT5-4FT-C30-W18 (30pk)	4 ft. T5 RetroStick	–	3000K	2520lm	18W	50,000	–	100–277V
	70604	LNT5-4FT-C30-W18 (4pk)	4 ft. T5 RetroStick	–	3000K	2520lm	18W	50,000	–	100–277V
	70401	LNT5-4FT-C40-W18 (30pk)	4 ft. T5 RetroStick	–	4000K	2520lm	18W	50,000	–	100–277V
	70445	LNT5-4FT-C40-W18 (4pk)	4 ft. T5 RetroStick	–	4000K	2520lm	18W	50,000	–	100–277V
HO RETROSTICK	70640	LNT5-4FT-C40-W25-DIM (30pk)	4 ft. HO RetroStick	Premium	4000K	3500lm	25W	50,000	0-10V	120-277V
	70699	LNT5-4FT-C40-W25-DIM (4pk)	4 ft. HO RetroStick	Premium	4000K	3500lm	25W	50,000	0-10V	120-277V
	70641	LNT5-4FT-C50-W25-DIM (30pk)	4 ft. HO RetroStick	Premium	5000K	3500lm	25W	50,000	0-10V	120-277V
	70700	LNT5-4FT-C50-W25-DIM (4pk)	4 ft. HO RetroStick	Premium	5000K	3500lm	25W	50,000	0-10V	120-277V

*Sold Separately

LAMPS

Verbatim offers a wide range of high-quality LED lamps, ideal for a variety of applications including hospitality, residential and retail environments.

T8 Tubes

70412 | 70413 | 70414
70415 | 71151 | 71152

T8 Tube Accessories*

Dimming Driver for T8

71162

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE (BARE LAMP)	PET FILM	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING COMPATIBLE	INPUT VOLTAGE
TYPE B	70412	T8-4FT-C40-W12-BPDE150	T8 4 ft. Ballast Bypass Type B	√	4000K	1800lm	12W	√	220º	50,000	G13	√	120-277V
	70413	T8-4FT-C50-W12-BPDE150	T8 4 ft. Ballast Bypass Type B	√	5000K	1800lm	12W	√	220º	50,000	G13	√	120-277V
	71151	T8-4FT-C40-W18-BPDE125	T8 4 ft. Ballast Bypass Type B	√	4000K	2250lm	18W	√	220º	50,000	G13	√	120-277V
	71152	T8-4FT-C50-W18-BPDE125	T8 4 ft. Ballast Bypass Type B	√	5000K	2250lm	18W	√	220º	50,000	G13	√	120-277V
	70414	T8-4FT-C40-W18-BP-DE	T8 4 ft. Ballast Bypass Type B	-	4000K	2250lm	18W	√	230º	50,000	G13	-	120-277V
	70415	T8-4FT-C50-W18-BP-DE	T8 4 ft. Ballast Bypass Type B	-	5000K	2250lm	18W	√	230º	50,000	G13	-	120-277V

* Sold Separately

A19

70419 | 70422 | 70417 | 70420 | 70423 | 70425 | 70418 | 70421 | 70424 | 70426

70428

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
A19	70419	A19-C27-W9	A19		√	2700K	800lm	9W	60W	210º	25,000	E26	√	120V
	70422	A19-C27-W11	A19		√	2700K	1100lm	11W	75W	210º	25,000	E26	√	120V
	70417	A19-C30-W6	A19		√	3000K	480lm	6W	40W	210º	25,000	E26	√	120V
	70420	A19-C30-W9	A19		√	3000K	800lm	9W	60W	210º	25,000	E26	√	120V
	70423	A19-C30-W11	A19		√	3000K	1100lm	11W	75W	210º	25,000	E26	√	120V
	70425	A19-C30-W15	A19		√	3000K	1600lm	15W	100W	210º	25,000	E26	√	120V
	70418	A19-C50-W6	A19		√	5000K	480lm	6W	40W	210º	25,000	E26	√	120V
	70421	A19-C50-W9	A19		√	5000K	800lm	9W	60W	210º	25,000	E26	√	120V
	70424	A19-C50-W11	A19		√	5000K	1100lm	11W	75W	210º	25,000	E26	√	120V
	70426	A19-C50-W15	A19		√	5000K	1600lm	15W	100W	210º	25,000	E26	√	120V
	70428	A19-L450-C27-F	A19 Filament- Clear		√	2700K	450lm	4.5W	40W	Omni	15,000	E26	√	120V

BR30 / BR40

70435 | 71150

70437 | 70438

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
BR30	70435	R30-W11-C27	BR30		2700K	850lm	11W	65W	25,000	E26	√	120V
	71150	BR30-W11-C30	BR30		3000K	850lm	11W	65W	25,000	E26	√	120V
BR40	70437	R40-W12-C27	BR40		2700K	1050lm	12W	80W	25,000	E26	√	120V
	70438	R40-W12-C30	BR40		3000K	1050lm	12W	80W	25,000	E26	√	120V

PAR20/PAR30/PAR38

70170 | 70171 | 70189

70173 | 70174 | 70175
70176 | 70177

70178

70179 | 70180

70186 | 70188

70181 | 70182 | 70183
70184 | 70185

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	BASE	DIMMING	INPUT VOLTAGE	CRI
PAR20	70170	P20-L500-C30-B25-W	PAR20		√	3000K	500lm	7W	50W	25°	25,000	E26	√	120V	90
	70171	P20-L500-C30-B40-W	PAR20		√	3000K	500lm	7W	50W	40°	25,000	E26	√	120V	90
	70189	P20-L500-C40-B25-W	PAR20		√	4000K	500lm	7W	50W	25°	25,000	E26	√	120V	90
PAR30	70178	P30-L800-C27-B25-B	PAR30, Black		√	2700K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70173	P30-L800-C27-B40-W	PAR30		√	2700K	800lm	11W	75W	40°	40,000	E26	√	120V	90
	70179	P30SN-L800-C27-B25-W	PAR30, Short Neck		√	2700k	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70174	P30-L800-C30-B25-W	PAR30		√	3000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70175	P30-L800-C30-B40-W	PAR30		√	3000K	800lm	11W	75W	40°	40,000	E26	√	120V	90
	70180	P30SN-L800-C30-B25-W	PAR30, Short Neck		√	3000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70176	P30-L800-C40-B25-W	PAR30		√	4000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70177	P30-L800-C40-B40-W	PAR30		√	4000K	800lm	11W	75W	40°	40,000	E26	√	120V	90
PAR38	70181	P38-L1200-C27-B25-W	PAR38		√	2700k	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70186	P38-L1200-C27-B25-B	PAR38, Black		√	2700K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70182	P38-L1200-C30-B25-W	PAR38		√	3000K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70183	P38-L1200-C30-B40-W	PAR38		√	3000K	1200lm	17W	100W	40º	40,000	E26	√	120V	90
	70188	P38-L1200-C30-B25-B	PAR38, Black		√	3000K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70184	P38-L1200-C40-B40-W	PAR38		√	4000K	1200lm	17W	100W	40º	40,000	E26	√	120V	90
	70185	P38-L1200-C50-B25-W	PAR38		√	5000K	1200lm	17W	85W	25º	40,000	E26	√	120V	90

PAR56

Check out the latest PAR56 Video

70196 | 70197
70267 | 70642

Accessories*

HO PAR56 converts to fit into a PAR64 housing
71141

VERBATIM PART #		MODEL #	BULB TYPE	CBCP	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	BASE	DIMMING	INPUT VOLTAGE	CRI
PAR56	70196	P56-W40-C30-B25	PAR56	12500	√	3000K	3600lm	40W	300W	25°	50,000	GX16d	√	120V	90
	70197	P56-W40-C30-B15	PAR56	31500	√	3000K	3000lm	40W	300W	15°	50,000	GX16d	√	120V	90
	70267	P56-W40-C30-B25-WD	PAR56 - Warm Dimming	11000	√	1800-3000K	3000lm	40W	300W	25°	50,000	GX16d	√	120V	97
	70642	P56-W55-C30-B25-HO	PAR56 - High Output	16000	-	3000K	5000lm	55W	500W	25º	50,000	GX16d	√	120V	90+

* Sold Separately

S14

70198

70199

70200

70201

VERBATIM PART #		MODEL #	BULB TYPE	ENCLOSED RATED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
S14	70198	S14-L90-C22-E	S14- Amber	√	√	2200K	90lm	1.2W	11W	300	15,000	E26	–	120V
	70199	S14-L120-C27-E	S14- Clear	√	√	2700K	120lm	1.2W	11W	300	15,000	E26	–	120V
	70200	S14-L150-C22-E	S14- Amber	√	√	2200K	150lm	2W	15W	300	15,000	E26	–	120V
	70201	S14-L180-C27-E	S14- Clear	√	√	2700K	180lm	2W	15W	300	15,000	E26	–	120V

Candles / Globes

70689 | 70690

70429

70430

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	JA8 CERTIFIED	ENCLOSED RATED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
CANDLE	70689	CD-E12-L350-C27	Candle		√	–	–	2700K	350lm	4W	40W	N/A	25,000	E12	√	120V	90
	70690	CD-E12-L350-C30	Candle		√	–	–	3000K	350lm	4W	40W	N/A	25,000	E12	√	120V	90
FILAMENT	70429	CD-L300-C27-F	Candle Filament - Clear		–	√	√	2700K	300lm	4W	40W	Omni	15,000	E12	√	120V	80
	70430	G25-L450-C27-F	Globe Filament - Clear		–	√	√	2700K	450lm	4.5W	40W	Omni	15,000	E26	√	120V	80

AR111

99548 | 99549 | 99550
99551 | 99552 | 99950

VERBATIM PART #	MODEL #	BULB TYPE	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
99548	AR-L690-C27-B25-90-ID	AR111	2700K	690lm	10W	75W	25º	50,000	G53	√	12V	90
99549	AR-L690-C27-B40-90-ID	AR111	2700K	690lm	10W	75W	40º	50,000	G53	√	12V	90
99550	AR-L720-C30-B12-90-ID	AR111	3000K	720lm	10W	75W	12º	50,000	G53	√	12V	90
99551	AR-L720-C30-B25-90-ID	AR111	3000K	720lm	10W	75W	25º	50,000	G53	√	12V	90
99552	AR-L720-C30-B40-90-ID	AR111	3000K	720lm	10W	75W	40º	50,000	G53	√	12V	90
99950	AR-L720-C40-B25-90-ID	AR111	4000K	720lm	10W	75W	25º	50,000	G53	√	12V	90

MR16

70164 | 70165 | 70166

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
GU5.3	70164	M16-L500-C27-B35-E	MR16 GU5.3	✓	√	2700K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
GU5.3	70165	M16-L500-C30-B35-E	MR16 GU5.3	✓	√	3000K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
GU5.3	70166	M16-L500-C40-B35-E	MR16 GU5.3	✓	√	4000K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
GU10	71146	GU10-L500-C27-B40	MR16 GU10	-	√	2700K	500lm	7W	50W	40º	15,000	GU10	√	120V	90
GU10	71147	GU10-L500-C30-B40	MR16 GU10	-	√	3000K	500lm	7W	50W	40º	15,000	GU10	√	120V	90

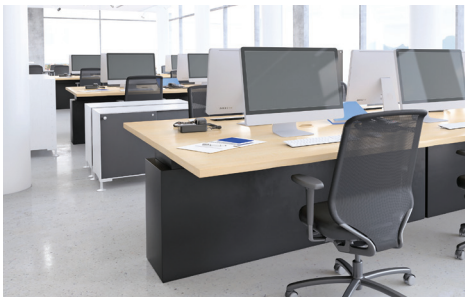

www.verbatimlighting.com

© Verbatim Americas LLC, 2022

May 2022

Verbatim™
Technology you can trust