2023

Product Catalog

LED Fixtures and Lamps

Verbatim Lighting

www.verbatimlighting.com

Fixtures 1

TranquiLED Series Low-Glare Downlights 2
Napoleon Downlight Series 3
JBox Downlights 4
Surface Mount Downlights 4
Retrofit Downlights 5
Commercial Downlights 6
Linear Fixtures 7
PnP Motion Sensor Ready Highbays 8
Flat Panels 9
RetroStick Series 10

Lamps 11

T8 Tubes	12
A19	13
BR30/BR40	14
PAR20/PAR30/PAR38	15
PAR56	16
S14	17
Candles/Globes	17
AR111	18
MR16/GU10	18

Fixtures

Verbatim LED fixtures are high-quality, efficient solutions for a variety of commercial applications including manufacturing, hospitality and office.

TranquiLED Series Low-Glare Downlights

Make comfort a priority with Verbatim™ TranquiLED Series low glare downlights. This elegant downlight features a unique reflector to produce low-glare lighting, ideal for offices, conference rooms, retail spaces, hotels, restaurants and more.

70251 | 70252 | 70253
70254 | 70259 | 70260
70261 | 70262

70255 | 70256 | 70257
70258 | 70263 | 70264
70265 | 70266

TranquiLED Driver*

TranquiLED Accessories



Goof Ring for 6" Downlight
71174

Downlight Installation Pan w/ Joist Arms
71176

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (CFL)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
0-10V	70251	D4TQ-C30-W14-V277	4 in. Downlight		3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70252	D4TQ-C40-W14-V277	4 in. Downlight		4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70253	D4TQ-C30-W27-V277	4 in. Downlight		3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70254	D4TQ-C40-W27-V277	4 in. Downlight		4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70255	D6TQ-C30-W14-V277	6 in. Downlight		3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70256	D6TQ-C40-W14-V277	6 in. Downlight		4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	0-10V	120-277V	90
	70257	D6TQ-C30-W27-V277	6 in. Downlight		3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
	70258	D6TQ-C40-W27-V277	6 in. Downlight		4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	0-10V	120-277V	90
PHASE CUT	70259	D4TQ-C30-W14-V120	4 in. Downlight		3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70260	D4TQ-C40-W14-V120	4 in. Downlight		4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70261	D4TQ-C30-W27-V120	4 in. Downlight		3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70262	D4TQ-C40-W27-V120	4 in. Downlight		4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70263	D6TQ-C30-W14-V120	6 in. Downlight		3000K	1200lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70264	D6TQ-C40-W14-V120	6 in. Downlight		4000K	1300lm	14W	1 x 32W or 2 x 18W	50,000	Phase cut	120V	90
	70265	D6TQ-C30-W27-V120	6 in. Downlight		3000K	2300lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90
	70266	D6TQ-C40-W27-V120	6 in. Downlight		4000K	2500lm	27W	1 x 42W or 2 x 26W	50,000	Phase cut	120V	90

* Included with TranquiLED Downlight

Napoleon 3” Downlight Series

Just like their namesake, the Napoleon LED downlights pack a lot of punch in a small form factor. These downlights feature 1200+ lumens output with a 2 inch light aperture with 3 inch trim. Additionally, they offer a modular design – complete with interchangeable trims and optics with included 15, 25, and 40 beam angle filters.

70651 | 70652 | 70653

Napoleon Trims*

Round white trim with white baffled reflector
70663

Round black trim with black baffled reflector
70664

Round white trim with white smooth reflector and 24º gimbal
70665

Round white eliptical trim with black baffled reflector
70666

Round white pin hole trim with black baffled reflector
70667

Square white trim with white baffled reflector
70668

Square white trim with black baffled reflector
71131

Square white wall wash trim with black baffled reflector
70669

Round white trim with smooth shallow reflector
70671

Round black trim with smooth shallow reflector
70672

Round white trim with smooth deep reflector
70670

Napoleon Accessories

Downlight Installation Pan w/ Joist Arms
71176

VERBATIM PART #		MODEL #	TYPE	JA8 CERTIFIED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (HALOGEN)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
NAPOLEON	70651	D2-C27-W13	3 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	2700K	1200lm	13W	75W	25,000	Phase cut	120V	90
	70652	D2-C30-W13	3 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	3000K	1250lm	13W	75W	25,000	Phase cut	120V	90
	70653	D2-C40-W13	3 in. Downlight w/ field selectable beam angle 15º, 25º or 40º	√	4000K	1300lm	13W	75W	25,000	Phase cut	120V	90

*Sold Separately

CCT Selectable JBox Downlights

Designed for remodeling and new construction, Verbatim™ LED Downlights with Integrated Junction Box feature wide light distribution and an ultra-slim profile, perfect for shallow ceiling plenums. UL listed and IC-rated, these downlights provide contractors with an attractive lighting solution that saves labor and material costs.

70621

70622

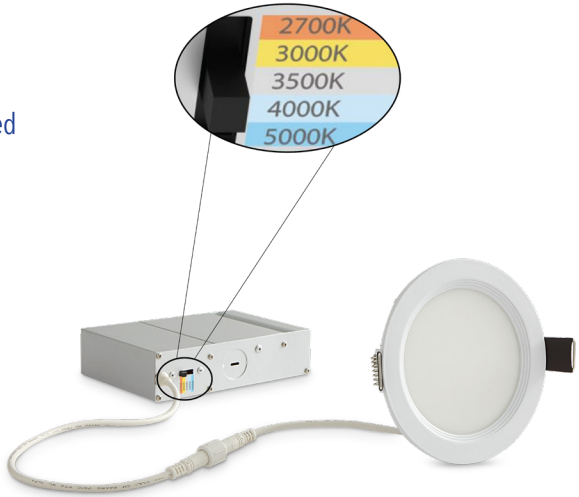

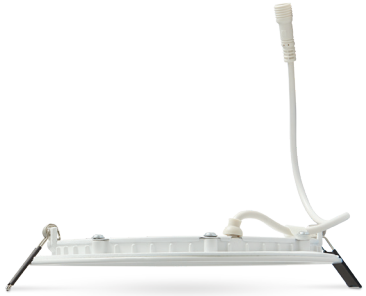

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	JA8 CERTIFIED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	70621	D4-L650-5CCT-JB	4 in. CCT Selectable Downlight w/ junction box		√	√	2700K/3000K/3500K 4000K/5000K Selectable	650lm	9W	60W	50,000	√	120V	90
	70622	D6-L900-5CCT-JB	6 in. CCT Selectable Downlight w/ junction box		√	√	2700K/3000K/3500K 4000K/5000K Selectable	900lm	12W	75W	50,000	√	120V	90

CCT Selectable Surface Mount Downlights

Verbatim Surface Mount Downlights are attractive 90 CRI downlights. These downlights render illuminated colors with great accuracy and uniform light. Ideal for a wide variety of residential and multi-family applications, these can be surface mounted or installed in a recessed can.

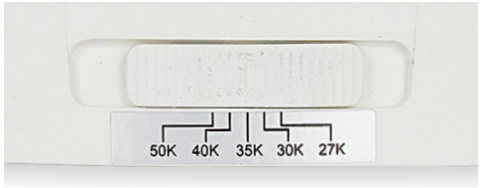

71164

71165

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	JA8 CERTIFIED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	71164	D5-L730-5CCT-SM	5 in. Downlight - Round		√	2700K/3000K/3500K/4000K/5000K Selectable	730lm	12W	75W	50,000	√	120V	90
	71165	D7-L1050-5CCT-SM	7 in. Downlight - Round		√	2700K/3000K/3500K/4000K/5000K Selectable	1050lm	13W	100W	50,000	√	120V	90

CCT Selectable Retrofit Downlights

Verbatim™ LED residential downlights are high-efficiency, one-piece solutions for contractors and homeowners. Ideal for both residential and commercial environments, these attractive, LED fixtures retrofit in most standard recessed can housings and are easy to install with a single piece design.

71142 | 71180

71143 | 71181

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	71142	D4-L650-5CCT-W8	4 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	650lm	8W	65W	50,000	E26	√	120V	90
	71143	D6-L1200-5CCT-W15	6 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	1200lm	15W	120W	50,000	E26	√	120V	90
	71180	D4-5CCT-3W	4 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	640lm/800lm/1040lm	8W/10W/13W Selectable	Up to 100W	50,000	E26	√	120V	90
	71181	D6-5CCT-3W	6 in. Downlight	✓	√	2700K/3000K/3500K/4000K/5000K Selectable	850lm/1100lm/1400lm	10W/13W/17W Selectable	Up to 120W	50,000	E26	√	120V	90

CCT and Wattage Selectable Commercial Downlights

Verbatim™ LED commercial downlights are high-efficiency, one-piece solutions for contractors and commercial property owners. These retrofit LED fixtures are easy to install with a single piece design. Now CCT and wattage selectable, these downlights easily switch between three different color temperatures and three different wattages to fit any application and aesthetic.

71158

71159

CCT and Wattage Switches

Commercial Downlights Accessories



Goof Ring for 6" Downlight
71174



Goof Ring for 8" Downlight
71175

Downlight Installation Pan w/ Arms
71176

VERBATIM PART #		MODEL #	TYPE	ENERGY STAR	T24	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE (CFL)	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE	CRI
DOWNLIGHTS	71158	D6-3CCT-3W-CD	6 in. Commercial Downlight		√	3000K/3500K/4000K Selectable	800lm/1200lm/1600lm	9W/13W/19W Selectable	18W/26W/32W	50,000	0-10V	120-277V	90
	71159	D8-3CCT-3W-CD	8 in. Commercial Downlight		√	3000K/3500K/4000K Selectable	1500lm/2000lm/2500lm	16.5W/23W/29W Selectable	32W/42W/65W	50,000	0-10V	120-277V	90

Linear Fixtures

Highly-efficient, these fixtures are cost-effective replacements for fluorescent tube fixtures in high-traffic, constant light areas. CCT selectable, these fixtures easily select between three different color temperatures, ideal for a variety of residential and hospitality applications.

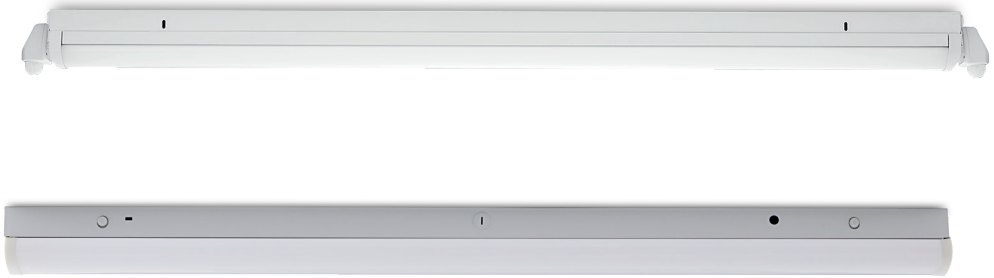

99305 | 99585

71182 | 70695

Linear Fixture Accessories*

Batten Remote
for 99305 & 99585
98992

End to End Support Bracket
& Connecting Kit for
71182 & 70695
71132

Suspension Kit for
71182 & 70696
71133

	VERBATIM PART #	MODEL #	TYPE	COLOR TEMP	LUMEN OUTPUT	WATTAGE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
BATTEN	99305	BAT-4FT-W26-C50-MS-NON	4 ft. Batten with dual motion sensor	5000K	3000lm	26W	50,000	Bi-level	100–277V
	99585	BAT-4FT-W26-C50-MS-NON-EM	4 ft. Batten with motion sensor & emergency backup	5000K	3000lm	26.5W	50,000	Bi-level	100–277V
LINEAR CHANNEL	71182	LN-2FT-W20-3CCT	2 ft. CCT Selectable Linear channel	3500K/4000K/5000K Selectable	2600lm	20W	50,000	0-10V	120-277V
	70695	LN-4FT-W40-3CCT	4 ft. CCT Selectable Linear channel	3500K/4000K/5000K Selectable	5200lm	40W	50,000	0-10V	120-277V

PnP Motion Sensor Ready Highbays

Superior performance and premium quality – now plug-and-play sensor ready! These high bays offer the same great performance and value you've come to expect but offer even more energy savings and flexibility with the optional PnP sensor.

70605 | 71169

70623 | 71170
70624

PnP Motion Sensor Ready Accessories

Plug and Play Microwave Motion Sensor

70681

Sensor Remote Control for 70681

70682

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	INPUT VOLTAGE
HIGH BAYS	70605	CRQ-150W-C50 [-MS;Blank]	10" Black Round High Bay w/PnP motion sensor receptical	√	5000K	22500lm	150W	400W HID	50,000	100-277V
	71169	CRQ-200W-C50 [-MS;Blank]	11.8" Black Round High Bay w/PnP motion sensor receptical	Premium	3500K/4000K/5000K Selectable	27000lm	200W	>400W HID	50,000	120-277V
	70623	HB-110W-C50 [-MS;Blank]	10" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	5000K	14850lm	110W	250W HID 4 x T5 tubes	50,000	120-277V
	71170	HB-165W-C50 [-MS;Blank]	13" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	3500K/4000K/5000K Selectable	22275lm	165W	400W HID 4 x T5 HO tubes	50,000	120-277V
	70624	HB-220W-C50 [-MS;Blank]	17" X 24"' Linear Highbay w/PnP motion sensor receptical	Premium	5000K	29700lm	220W	>400W HID 6 x T5 HO tubes	50,000	120-277V

CCT Selectable Flat Panels

Verbatim™ LED Panels offer high performance and versatility for both retrofit and new construction. Featuring a backlit design, these panels include LEDs with PMMA micro-optic lensing to create comfortable and uniform light. Our CCT selectable panels let you choose between 3500K, 4000K and 5000K color temperatures during installation to create the perfect look and feel for your application.

71163 | 70693

71155 | 71156 | 70694

Flat Panel Accessories*

2' x 2' Surface Mount Kit
99271

2' x 4' Surface Mount Kit
99345

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	BEAM ANGLE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
BACKLIT PANELS	71163	PN22-3W-3CCT-P	2 ft. X 2 ft. Backlit Panel	Premium	3500K/4000K/5000K Selectable	2500lm/3125lm/3750lm Selectable	20W/25W/30W Selectable	120º	50,000	0-10V	100-277V
	71156	PN24-3W-3CCT-P	2 ft. X 4 ft. Backlit Panel	Premium	3500K/4000K/5000K Selectable	3750lm/4375lm/5000lm Selectable	30W/35W/40W Selectable	120º	50,000	0-10V	100-277V
	71155	PN24-W40-C40-P	2 ft. X 4 ft. Backlit Panel	Premium	4000K	5000lm	40W	120º	50,000	0-10V	100-277V
	70693	PN22-W40-3CCT-EM	2 ft. X 2 ft. Backlit Panel w/EM battery backup	-	3500K/4000K/5000K Selectable	4400lm	40W/8W in EM	120º	50,000	0-10V	100-277V
	70694	PN24-W50-3CCT-EM	2 ft. X 4 ft. Backlit Panel w/EM battery backup	-	3500K/4000K/5000K Selectable	5500lm	50W/8W in EM	120º	50,000	0-10V	100-277V

* Sold Separately

RetroStick Series

Verbatim™ RetroStick linear fixtures are a low-cost retrofit solution, ideal for a variety of applications including replacing fluorescent T12, T8 or T5 fixtures, continuous row mounting, cove lighting or new construction. (HO) RetroStick LED Linear Fixtures combine performance, functionality and value, ideal for high ceiling applications such as retail, education, manufacturing and corporate spaces.

71172 | 71173
71177 | 71178

70640 | 70699
70641 | 70700

RetroStick Accessories*

Power Cable
12" - 70402
36" - 70441

Power Cable with
90° Connector
36" - 70456

Connecting Cord
7" - 70404
12" - 70403

Connecting Cord
with 90° Connector
12" - 70457

Surface Mount
Bracket
70407

HO RetroStick Accessories*

Power Cable
36" - 70656

Connecting Cord
15" - 70657

End to End Support Bracket
70687

Suspension Kit
70688

Surface Mount Kit
70696

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE	DESIGN LIFETIME (HRS)	DIMMING	INPUT VOLTAGE
RETROSTICK	71172	LN-4FT-C40-W18-D (30pk)	4ft Retrostick	√	4000K	2520lm	18W	50,000	√	120V
	71177	LN-4FT-C40-W18-D (4pk)	4ft Retrostick	√	4000K	2520lm	18W	50,000	√	120V
	71173	LN-4FT-C50-W18-D (30pk)	4ft Retrostick	√	5000K	2520lm	18W	50,000	√	120V
	71178	LN-4FT-C50-W18-D (4pk)	4ft Retrostick	√	5000K	2520lm	18W	50,000	√	120V
HO RETROSTICK	70640	LNT5-4FT-C40-W25-DIM (30pk)	4 ft. HO RetroStick	√	4000K	3500lm	25W	50,000	0-10V	120-277V
	70699	LNT5-4FT-C40-W25-DIM (4pk)	4 ft. HO RetroStick	√	4000K	3500lm	25W	50,000	0-10V	120-277V
	70641	LNT5-4FT-C50-W25-DIM (30pk)	4 ft. HO RetroStick	√	5000K	3500lm	25W	50,000	0-10V	120-277V
	70700	LNT5-4FT-C50-W25-DIM (4pk)	4 ft. HO RetroStick	√	5000K	3500lm	25W	50,000	0-10V	120-277V

*Sold Separately

LAMPS

Verbatim offers a wide range of high-quality LED lamps, ideal for a variety of applications including hospitality, residential and retail environments.

T8 Tubes

Verbatim T8 LED Tubes are designed as energy efficient replacements for T8 fluorescent tubes. Available in ballast bypass double ended type B, these lamps offer a wide light distribution and significantly reduce energy consumption when compared to traditional fluorescent tubes.

70414 | 70415
71151 | 71152

VERBATIM PART #		MODEL #	TYPE	DLC	COLOR TEMP	LUMEN OUTPUT	WATTAGE (BARE LAMP)	PET FILM	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING COMPATIBLE	INPUT VOLTAGE
TYPE B	70414	T8-4FT-C40-W18-BP-DE	T8 4 ft. Ballast Bypass Type B	-	4000K	2250lm	18W	√	230º	50,000	G13	-	120-277V
	70415	T8-4FT-C50-W18-BP-DE	T8 4 ft. Ballast Bypass Type B	-	5000K	2250lm	18W	√	230º	50,000	G13	-	120-277V

A19

The Verbatim 2700K-5000K A19 lamp is rated for use in enclosed fixtures and an energy-saving LED replacement for 40W-100W incandescent bulbs. A19 lamps produce a range of high quality, soft white light, warm white light, and daylight. When compared to incandescent bulbs, these lamps reduce over 85% of energy costs compared to incandescent bulbs.

70419 | 70422 | 70417
70420 | 70421 | 70424

70428

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
A19	70419	A19-C27-W9	A19		√	2700K	800lm	9W	60W	210º	25,000	E26	√	120V
	70422	A19-C27-W11	A19		√	2700K	1100lm	11W	75W	210º	25,000	E26	√	120V
	70417	A19-C30-W6	A19		√	3000K	480lm	6W	40W	210º	25,000	E26	√	120V
	70420	A19-C30-W9	A19		√	3000K	800lm	9W	60W	210º	25,000	E26	√	120V
	70421	A19-C50-W9	A19		√	5000K	800lm	9W	60W	210º	25,000	E26	√	120V
	70424	A19-C50-W11	A19		√	5000K	1100lm	11W	75W	210º	25,000	E26	√	120V
	70428	A19-L450-C27-F	A19 Filament- Clear		√	2700K	450lm	4.5W	40W	Omni	15,000	E26	√	120V

BR30/BR40

The Verbatim 2700K-3000K, BR30 / BR40 LED lamps are an excellent, economical replacement for 65W-80W halogen flood lamps. Suitable for both commercial and residential settings, these LED lamps are ideal for track fixtures and downlights where softer illumination is preferred.

70435 | 71150

70437 | 70438

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
BR30	70435	R30-W11-C27	BR30		2700K	850lm	11W	65W	25,000	E26	√	120V
	71150	BR30-W11-C30	BR30		3000K	850lm	11W	65W	25,000	E26	√	120V
BR40	70437	R40-W12-C27	BR40		2700K	1050lm	12W	80W	25,000	E26	√	120V
	70438	R40-W12-C30	BR40		3000K	1050lm	12W	80W	25,000	E26	√	120V

PAR20/PAR30/PAR38

The Verbatim 2700K-3000K PAR20/PAR30/PAR38 LED lamps are power-saving 50-100-watt replacement lamps. Ideal for commercial and residential applications, these lamps feature non-glare optics, to reduce eyestrain and maximize productivity.

70170 | 70171 | 70189

70173 | 70174 | 70175
70176 | 70177

70178

70180

70186 | 70188

70181 | 70182 | 70183
70184 | 70185

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	BASE	DIMMING	INPUT VOLTAGE	CRI
PAR20	70170	P20-L500-C30-B25-W	PAR20	-	√	3000K	500lm	7W	50W	25°	25,000	E26	√	120V	90
	70171	P20-L500-C30-B40-W	PAR20	✓	√	3000K	500lm	7W	50W	40°	25,000	E26	√	120V	90
	70172	P20-L500-C30-B25-90-B-E	PAR20, Black	✓	√	3000K	500lm	7W	50W	25º	25,000	E26	√	120V	90
	70189	P20-L500-C40-B25-W	PAR20	-	√	4000K	500lm	7W	50W	25°	25,000	E26	√	120V	90
PAR30	70178	P30-L800-C27-B25-B	PAR30, Black	✓	√	2700K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70173	P30-L800-C27-B40-W	PAR30	✓	√	2700K	800lm	11W	75W	40°	40,000	E26	√	120V	90
	70174	P30-L800-C30-B25-W	PAR30	✓	√	3000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70175	P30-L800-C30-B40-W	PAR30	✓	√	3000K	800lm	11W	75W	40°	40,000	E26	√	120V	90
	70180	P30SN-L800-C30-B25-W	PAR30, Short Neck	✓	√	3000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70176	P30-L800-C40-B25-W	PAR30	✓	√	4000K	800lm	11W	50W	25°	40,000	E26	√	120V	90
	70177	P30-L800-C40-B40-W	PAR30	✓	√	4000K	800lm	11W	75W	40°	40,000	E26	√	120V	90
PAR38	70181	P38-L1200-C27-B25-W	PAR38	✓	√	2700k	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70186	P38-L1200-C27-B25-B	PAR38, Black	✓	√	2700K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70182	P38-L1200-C30-B25-W	PAR38	✓	√	3000K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70183	P38-L1200-C30-B40-W	PAR38	✓	√	3000K	1200lm	17W	100W	40º	40,000	E26	√	120V	90
	70188	P38-L1200-C30-B25-B	PAR38, Black	✓	√	3000K	1200lm	17W	85W	25°	40,000	E26	√	120V	90
	70184	P38-L1200-C40-B40-W	PAR38	✓	√	4000K	1200lm	17W	100W	40º	40,000	E26	√	120V	90
	70185	P38-L1200-C50-B25-W	PAR38	✓	√	5000K	1200lm	17W	85W	25º	40,000	E26	√	120V	90

PAR56

Reduce energy and maintenance costs without sacrificing performance with Verbatim PAR56 LED lamps. These revolutionary lamps were uniquely designed to have best-in-class Center Beam Candle Power (CBCP), ideal for retrofitting directional lighting in high ceiling applications, including houses of worship, theatres, auditoriums, casinos and more. These lamps are available with an adaptor ring to convert the HO PAR56 to fit in a PAR64 housing.

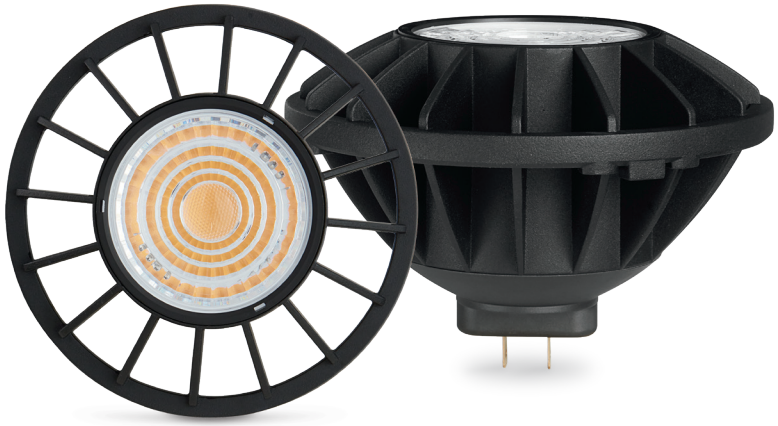

70196 | 70197
70267 | 70642

Accessories*

HO PAR56 converts to fit into a PAR64 housing
71141

VERBATIM PART #		MODEL #	BULB TYPE	CBCP	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	BASE	DIMMING	INPUT VOLTAGE	CRI
PAR56	70196	P56-W40-C30-B25	PAR56	12500	√	3000K	3600lm	40W	300W	25°	50,000	GX16d	√	120V	90
	70197	P56-W40-C30-B15	PAR56	31500	√	3000K	3000lm	40W	300W	15°	50,000	GX16d	√	120V	90
	70267	P56-W40-C30-B25-WD	PAR56 - Warm Dimming	11000	√	1800-3000K	3000lm	40W	300W	25°	50,000	GX16d	√	120V	97
	70642	P56-W55-C30-B25-HO	PAR56 - High Output	16000	-	3000K	5000lm	55W	500W	25º	50,000	GX16d	√	120V	90+

* Sold Separately

S14

The Verbatim S14 2200K-2700K LED lamps are premium, power-saving 11-15-watt replacement lamps. These lamps are an ideal solution to replace bulbs in string lights for patios and other outdoor area lighting including signage, enhancing warmth of light for exterior applications.

70198

70199

70200

70201

VERBATIM PART #		MODEL #	BULB TYPE	ENCLOSED RATED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE
S14	70198	S14-L90-C22-E	S14- Amber	√	√	2200K	90lm	1.2W	11W	300	15,000	E26	–	120V
	70199	S14-L120-C27-E	S14- Clear	√	√	2700K	120lm	1.2W	11W	300	15,000	E26	–	120V
	70200	S14-L150-C22-E	S14- Amber	√	√	2200K	150lm	2W	15W	300	15,000	E26	–	120V
	70201	S14-L180-C27-E	S14- Clear	√	√	2700K	180lm	2W	15W	300	15,000	E26	–	120V

Candles/Globes

The Verbatim™ 2700K-3000K Candle / Globe LED lamps are a prime, energy efficient 40-watt replacement for incandescent candle bulbs. With a smooth, streamlined exterior and vintage look and feel of traditional incandescent filament lamps, these lamps are ideal for chandelier and wall sconce fixtures.

70689 | 70690

70429

70430

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	JA8 CERTIFIED	ENCLOSED RATED	UL WET RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
CANDLE	70689	CD-E12-L350-C27	Candle	✓	√	–	–	2700K	350lm	4W	40W	N/A	25,000	E12	√	120V	90
	70690	CD-E12-L350-C30	Candle	✓	√	–	–	3000K	350lm	4W	40W	N/A	25,000	E12	√	120V	90
FILAMENT	70429	CD-L300-C27-F	Candle Filament - Clear	✓	–	√	√	2700K	300lm	4W	40W	Omni	15,000	E12	√	120V	80
	70430	G25-L450-C27-F	Globe Filament - Clear	✓	–	√	√	2700K	450lm	4.5W	40W	Omni	15,000	E26	√	120V	80

AR111

Verbatim™ High CRI Indirect AR111 LED Lamps are top-quality, energy-saving replacements for halogen AR111 lamps. Using a patented reflector, these lamps are available in a variety of beam angle options for spot, narrow flood, and flood lighting, these lamps are ideal for use in museums, retail and hospitality applications.

99548 | 99549 | 99550
99551 | 99552 | 99950

VERBATIM PART #		MODEL #	BULB TYPE	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
AR111	99548	AR-L690-C27-B25-90-ID	AR111	2700K	690lm	10W	75W	25º	50,000	G53	√	12V	90
	99549	AR-L690-C27-B40-90-ID	AR111	2700K	690lm	10W	75W	40º	50,000	G53	√	12V	90
	99550	AR-L720-C30-B12-90-ID	AR111	3000K	720lm	10W	75W	12º	50,000	G53	√	12V	90
	99551	AR-L720-C30-B25-90-ID	AR111	3000K	720lm	10W	75W	25º	50,000	G53	√	12V	90
	99552	AR-L720-C30-B40-90-ID	AR111	3000K	720lm	10W	75W	40º	50,000	G53	√	12V	90
	99950	AR-L720-C40-B25-90-ID	AR111	4000K	720lm	10W	75W	25º	50,000	G53	√	12V	90

MR16/GU10

The Verbatim MR16/GU10 LED lamps are exceptionally economical 50-watt replacement lamps. Fully dimmable, these LED lamps produce a smooth, white, streamlined exterior and are an excellent choice for indoor pendant or track lighting applications.

70164 | 70165 | 70166

71146 | 71147

VERBATIM PART #		MODEL #	BULB TYPE	ENERGY STAR	ENCLOSED RATED	COLOR TEMP	LUMEN OUTPUT	WATTAGE	REPLACEMENT EQUIVALENCE	BEAM ANGLE	DESIGN LIFETIME (HRS)	SOCKET	DIMMING	INPUT VOLTAGE	CRI
GU5.3	70164	M16-L500-C27-B35-E	MR16 GU5.3		√	2700K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
	70165	M16-L500-C30-B35-E	MR16 GU5.3		√	3000K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
	70166	M16-L500-C40-B35-E	MR16 GU5.3		√	4000K	500lm	6W	50W	35º	25,000	GU5.3	√	12V	80
GU10	71146	GU10-L500-C27-B40	MR16 GU10	-	-	2700K	500lm	7W	50W	40º	15,000	GU10	√	120V	90
	71147	GU10-L500-C30-B40	MR16 GU10	-	-	3000K	500lm	7W	50W	40º	15,000	GU10	√	120V	90

Verbatim Lighting

Visit **www.verbatimlighting.com** for detailed product information, including:

- Features and Benefits
- Cut Sheets
- Overviews
- Installation Guides
- Technical Diagrams

© Verbatim Americas LLC, 2023

February 2023

Verbatim™
Technology you can trust